



MOTALA EASY UP

THE LIFT THAT FITS ANYWHERE

MOTALA

LARGEST INSIDE SMALLEST OUTSIDE

NEW

The revolution is here and it's called **Motala Easy Up (MEU)**. A modern lift solution that combines smart technology with sleek design. Because it comes with its own shaft, there's no need for extensive building modifications, making it ideal for both new constructions and existing properties. **New lift but with the same unique space efficiency "LARGEST INSIDE SMALLEST OUTSIDE".**



Powered by the most energy-efficient chain drive, Motala Easy Up is one of the most eco-friendly lifts on the market. It's designed to blend seamlessly into any environment and offers several smart features:

- Minimum structural impact – its self-supporting shaft means no costly construction work, no supporting wall required.
- Market-leading energy efficiency – powered by a reliable chain drive with life time warranty.
- Tailor-made flexibility – reversible doors and adjustable configurations on site.
- Ready when you are – the first lift available as a stock product.
- Designed to impress – clean lines, stylish walls, recessed features and no bulky cabinets. Hidden door operators.



- ✓ SILENT AND SAFE
- ✓ DRIVE SYSTEM GUIDED CHAIN
- ✓ SELF SUPPORTING SHAFT
- ✓ DESIGNED TO IMPRESS
- ✓ LIFETIME WARRANTY ON CHAIN DRIVE
- ✓ GLAZE ALL FOUR SIDES

Lift for indoor installation

Whether for a private residence, office or public facility, Motala Easy Up delivers accessibility without compromise.


| | |
|----------------------------|--|
| Size: | Standard size 1250 x1500 mm (platform size according to EN81-70). Shaft width 1150/1250/1350 mm. Depth 1015/1500/1760 mm. |
| Travel: | Maximum 15 meters travel. |
| Speed: | 0.15 m/s. Hold to run on platform. Singel push outside EU. |
| Rated load: | Max 500 kg. |
| Stops: | 2-6 |
| Supply voltage: | Single phase 230-240V 10 A. |
| Drive system: | Guided chain drive with lifetime warranty. 0.75 kW asynchronous electric motor. |
| Shaft: | Self supporting shaft, no need for conventional shaft or supporting wall. Headroom height 2350 mm. Powder coated MH-White (Snowberry white, RAL9010), you can choose any color from the RAL-scale. |
| Glazing: | Possible to glaze on all four sides. |
| Doors: | Width 800, 900 or 1000 mm. Height 1900, 2000 or 2100 mm. |
| Pit: | 60 mm deep pit or ramp. |
| Emergency lowering: | Automatic emergency lowering to nearest landing below, or manual lowering. |
| Certification: | Certified European Union Machinery Directive 2006/42/EC and European Harmonized Standard EN81-41. |

Motor and gearbox

- Five years warranty
- Power: 0.75 kW
- Soft start and stop

Environmentally friendly

- One of the most energy efficient lifts on the market
- No lubrication needed
- 95% recyclable

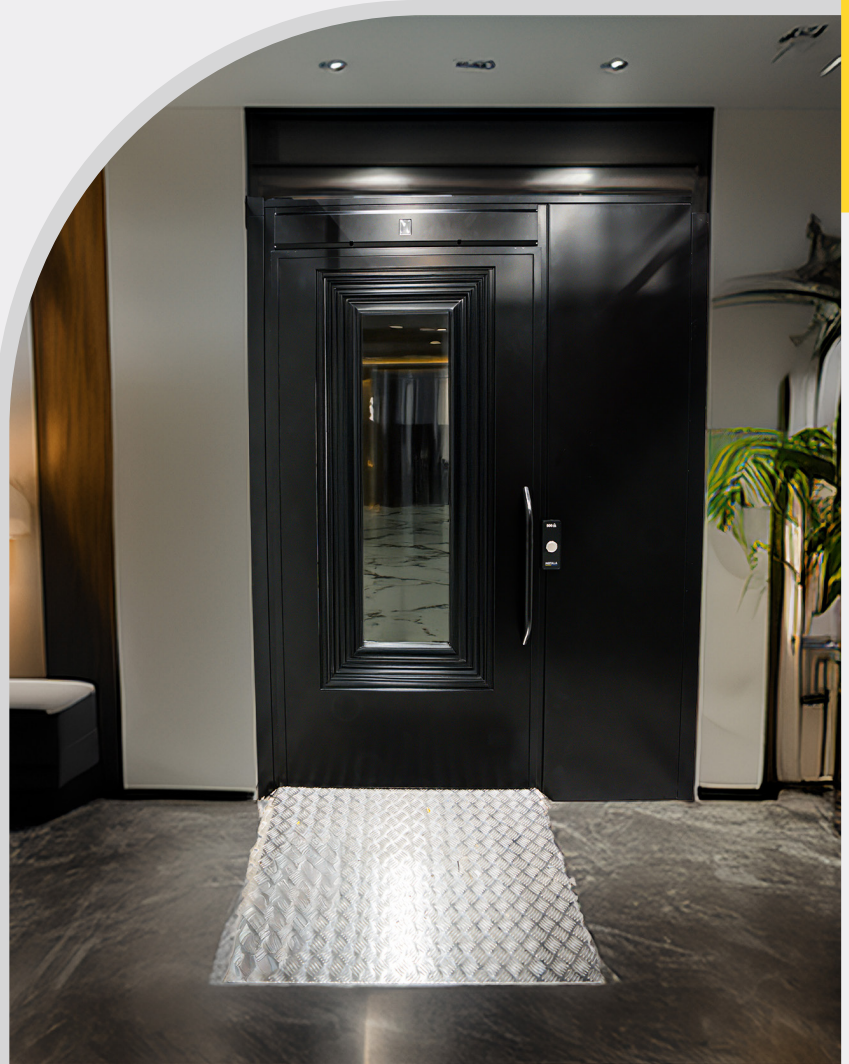

CONTACT

+46 141 23 70 50

WWW.MOTALAHISSAR.SE

